PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : E21B 37/06, 41/02, 43/25	A1	(11) International Publication Number: WO 00/37770 (43) International Publication Date: 29 June 2000 (29.06.00)

(21) International Application Number: PCT/US99/30448

(22) International Filing Date: 17 December 1999 (17.12.99)

(30) Priority Data:
09/218,067 21 December 1998 (21.12.98) US
60/153,175 10 September 1999 (10.09.99) US

(71) Applicant: BAKER HUGHES INCORPORATED [US/US]; Suite 1200, 3900 Essex Lane, Houston, TX 77027 (US).

(72) Inventor: KOHL, Kristopher, T.; 1611 Imperial Crown, Houston, TX 77043 (US).

(74) Agent: MADAN, Paul, S.; Baker Hughes Incorporated, Suite 1200, 3900 Essex Lane, Houston, TX 77027 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: CLOSED LOOP CHEMICAL INJECTION AND MONITORING SYSTEM FOR OILFIELD OPERATIONS

(57) Abstract

A system is provided that monitors at the wellsite injection of additives into formation fluids recovered through well bores and controls the supply of such additives from remote locations. A pump supplies the selected additive from a source at the wellsite into the wellbore via a suitable supply line. A flow meter in the supply line measures the flow rate of the additive through the supply line and generates signals representative of the flow rate. A controller at the wellsite determines the flow rate from the flow meter signals and in response thereto controls the pump to control the flow rate of the additive to the well. The wellsite controller interfaces with a suitable two-way communication link and transmits signals and data representative of the flow rate and other parameters to a second remote controller. The remote controller transmits command signals to the wellsite controller representative of any change desired for the flow rate. The wellsite controller is microprocessor based and may be programmed at the wellsite or by the remote controller to adjust the flow rate. The system of the present invention may be configured for multiple wells, with each well having a separate wellsite controller or a common wellsite controller.

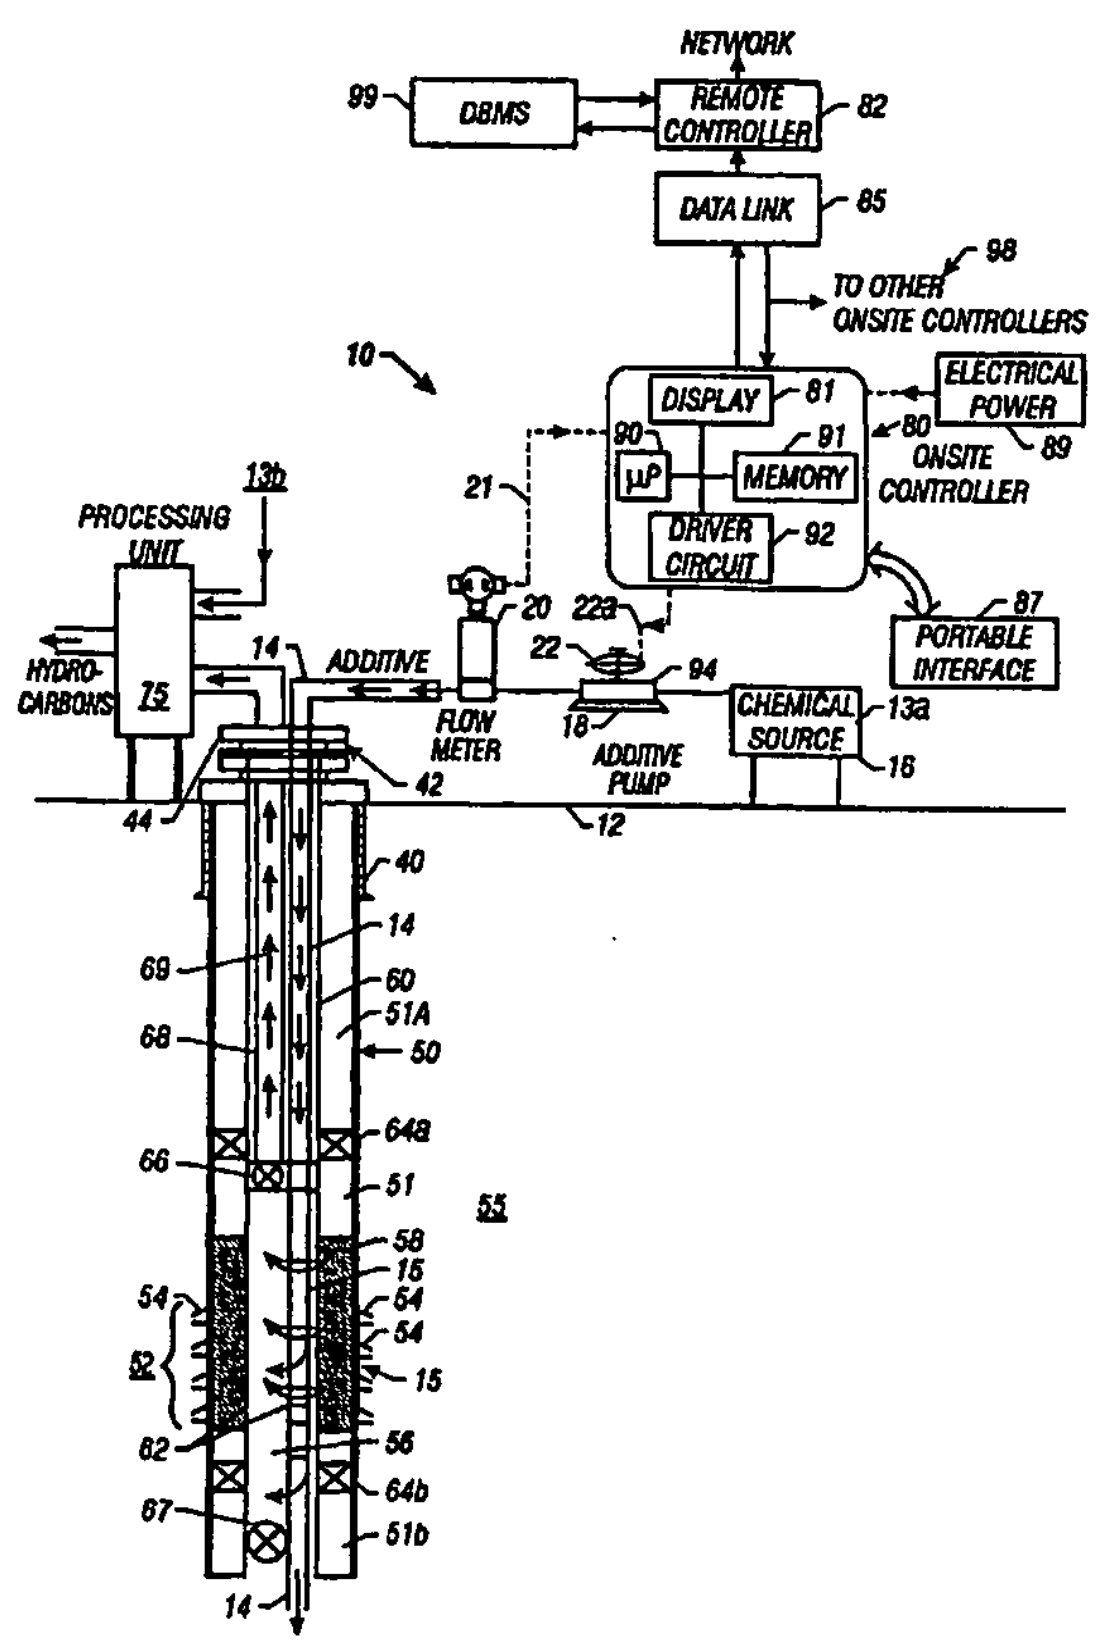

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania
AM	Armenia
AT	Austria
AU	Australia
AZ	Azerbaijan
BA	Bosnia and Herzegovina
BB	Barbados
BE	Belgium
BF	Burkina Faso
BG	Bulgaria
BJ	Benin
BR	Brazil
BY	Belarus
CA	Canada
CF	Central African Republic
CG	Congo
CH	Switzerland
CI	Côte d'Ivoire
CM	Cameroon
CN	China
CU	Cuba
CZ	Czech Republic
DE	Germany
DK	Denmark
EE	Estonia
ES	Spain
FI	Finland
FR	France
GA	Gabon
GB	United Kingdom
GE	Georgia
GH	Ghana
GN	Guinea
GR	Greece
HU	Hungary
IE	Ireland
IL	Israel
IS	Iceland
IT	Italy
JP	Japan
KE	Kenya
KG	Kyrgyzstan
KP	Democratic People's Republic of Korea
KR	Republic of Korea
KZ	Kazakstan
LC	Saint Lucia
LI	Liechtenstein
LK	Sri Lanka
LR	Liberia
LS	Lesotho
LT	Lithuania
LU	Luxembourg
LV	Latvia
MC	Monaco
MD	Republic of Moldova
MG	Madagascar
MK	The former Yugoslav Republic of Macedonia
ML	Mali
MN	Mongolia
MR	Mauritania
MW	Malawi
MX	Mexico
NE	Niger
NL	Netherlands
NO	Norway
NZ	New Zealand
PL	Poland
PT	Portugal
RO	Romania
RU	Russian Federation
SD	Sudan
SE	Sweden
SG	Singapore
SI	Slovenia
SK	Slovakia
SN	Senegal
SZ	Swaziland
TD	Chad
TG	Togo
TJ	Tajikistan
TM	Turkmenistan
TR	Turkey
TT	Trinidad and Tobago
UA	Ukraine
UG	Uganda
US	United States of America
UZ	Uzbekistan
VN	Viet Nam
YU	Yugoslavia
ZW	Zimbabwe

CLOSED LOOP CHEMICAL INJECTION AND MONITORING SYSTEM FOR OILFIELD OPERATIONS

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to oilfield operations and more particularly to a remotely/network-controlled chemical injection system for injecting precise amounts of additives or chemicals into wellbores, wellsite hydrocarbon processing units, pipelines, and chemical processing units.

2. Background of the Art

A variety of chemicals (also referred to herein as "additives") are often introduced into producing wells, wellsite hydrocarbon processing units, oil and gas pipelines and chemical processing units to control, among other things, corrosion, scale, paraffin, emulsion, hydrates, asphaltenes and formation of other harmful chemicals. In oilfield production wells, chemicals are usually injected through a tubing (also referred to herein as "conductor line") that is run from the surface to a

known depth. Chemicals are introduced in connection with electrical submersible pumps (as shown for example in U.S. Patent No. 4,582,131 which is assigned to the assignee hereof and incorporated herein by reference) or through an auxiliary tubing associated with a power cable used with the electrical submersible pump (such as shown in U.S. Patent No. 5,528,824 (assigned to the assignee hereof and incorporated herein by reference). Injection of chemicals into fluid treatment apparatus at the well site and pipelines carrying produced hydrocarbons is also known.

For oil well applications, a high pressure pump is typically used to inject a chemical into the well from a source thereof at the wellsite. The pump is usually set to operate continuously at a set speed or stroke length to control the amount of the injected chemical. A separate pump and an injector are typically used for each type of chemical. Manifolds are sometimes used to inject chemicals into multiple wells, production wells are sometimes unmanned and are often located in remote areas or on substantially unmanned offshore platforms. A recent survey by Baker Hughes Incorporated of certain wellbores revealed that as many as thirty percent (30%) of the chemical pumping systems at unmanned locations were either injecting incorrect amounts of the chemicals or were totally inoperative. Insufficient amounts of treatment chemicals can increase the

formation of corrosion, scale, paraffins, emulsion, hydrates etc., thereby reducing hydrocarbon production, the operating life of the wellbore equipment and the life of the wellbore itself, requiring expensive rework operations or even the abandonment of the wellbore. Excessive corrosion in a pipeline, especially a subsea pipeline, can rupture the pipeline, contaminating the environment. Repairing subsea pipelines can be cost-prohibitive.

Commercially-used wellsite chemical injection apparatus usually requires periodic manual inspection to determine whether the chemicals are being dispensed correctly. It is important and economically beneficial to have chemical injection systems which can supply precise amounts of chemicals and which systems are adapted to periodically or continuously monitor the actual amount of the treatment chemicals being dispensed, determine the impact of the dispersed chemicals, vary the amount of dispersed chemicals as needed to maintain certain desired parameters of interest within their respective desired ranges or at their desired values, communicate necessary information with offsite locations and take actions based in response to commands received from such offsite locations. The system should also include self-adjustment within defined parameters. Such a system should also be developed for monitoring and

controlling chemical injection into multiple wells in an oilfield or into multiple wells at a wellsite, such as an offshore production platform. Manual intervention at the wellsite of the system to set the system parameters and to address other operational requirements should also be available.

The present invention addresses the above-noted problems and provides a chemical injection system which dispenses precise amounts of chemicals, monitors the dispensed amounts, communicates with remote locations, takes corrective actions locally, and/or in response to commands received from the remote locations.

SUMMARY OF THE INVENTION

In one embodiment the present invention provides a wellsite chemical injection system that injects, monitors and controls the supply of chemicals into fluids recovered through wellbores, including with input from remote locations as appropriate. The system includes a pump that supplies, under pressure, a selected additive from a source thereof at the wellsite into the wellbore via a suitable supply line. A flow meter in the supply line measures the flow rate of the additive and generates signals

representative of the flow rate. A controller at the wellsite (wellsite or onsite controller) determines from the flow meter signals the chemical flow rate, presents that rate on a display and controls the operation of the pump according to stored parameters in the controller and in response to command signals received from a remote location. The controller interfaces with a suitable two-way communication link and transmits signals and data representative of the flow rate and other relevant information to a second controller at a remote location preferably via an EIA-232 or EIA-485 communication interface. The remote controller may be a computer and may be used to transmit command signals to the wellsite controller representative of any change desired for the flow rate. The wellsite controller adjusts the flow rate of the additive to the wellbore to achieve the desired level of chemical additives.

The wellsite controller is preferably microprocessor-based system and can be programmed to adjust the flow rate automatically when the calculated flow rate is outside predetermined limits provided to the controller. The flow rate is increased when it falls below a lower limit and is decreased when it exceeds an upper limit.

The system of the present invention may be configured for multiple wells at a wellsite, such as an offshore platform. In one embodiment, such a system includes a separate pump, a fluid line and an onsite controller for each well. Alternatively, a suitable common onsite controller may be provided to communicate with and to control multiple wellsite pumps via addressable signaling. A separate flow meter for each pump provides signals representative of the flow rate for its associated pump to the onsite common controller. The onsite controller may be programmed to display the flow rates in any order as well as other relevant information. The onsite controller at least periodically polls each flow meter and performs the above-described functions. The common onsite controller transmits the flow rates and other relevant or desired information for each pump to a remote controller. The common onsite controller controls the operation of each pump in accordance with the stored parameters for each such pump and in response to instructions received from the remote controller. If a common additive is used for a number of wells, a single additive source may be used. A single or common pump may also be used with a separate control valve in each supply line that is controlled by the controller to adjust their respective flow rates.

A suitable precision low-flow, flow meter is utilized to make precise measurements of the flow rate of the injected chemical. Any positive displacement-type flow meter, including a rotating flow meter, may also be used. The onsite controller is environmentally sealed and can operate over a wide temperature range. The present system is adapted to port to a variety of software and communications protocols and may be retrofitted on the commonly used manual systems, existing process control systems, or through uniquely developed chemical management systems developed independently or concurrently.

The chemical injection of the present invention may also utilize a mixer wherein different chemicals are mixed or combined at the wellsite and the combined mixture is injected by a common pump and metered by a common meter. The onsite controller controls the amounts of the various chemicals into the mixer. The chemical injection system may further include a plurality of sensors downhole which provide signals representative of one or more parameters of interest relating to the characteristics of the produced fluid, such as the presence or formation of sulphites, paraffin, emulsion, scale, asphaltenes, hydrates, fluid flow rates from various perforated zones, flow rates through downhole valves, downhole pressures and any other desired parameter. The system may

also include sensors or testers at the surface which provide information about the characteristics of the produced fluid. The measurements relating to these various parameters are provided to the wellsite controller which interacts with one or more models or programs provided to the controller or determines the amount of the various chemicals to be injected into the wellbore and/or into the surface fluid treatment unit and then causes the system to inject the correct amounts of such chemicals. In one aspect, the system continuously or periodically updates the models based on the various operating conditions and then controls the chemical injection in response to the updated models. This provides a closed-loop system wherein static or dynamic models may be utilized to monitor and control the chemical injection process.

The system of the present invention is equally applicable to monitoring and control of chemical injection into oil and gas pipelines, wellsite fluid treatment units, and refining and petrochemical chemical treatment applications.

BRIEF DESCRIPTION OF THE DRAWINGS

For a detailed understanding of the present invention, reference should be made to the following detailed description of the preferred embodiments, taken in conjunction with the accompanying drawings, in which like elements have been given like numerals, wherein:

Figure 1 is a schematic illustration of a chemical injection and monitoring system according to one embodiment of the present invention.

Figure 1A shows an alternative manner for controlling the operation of the chemical additive pump.

Figure 1B shows a circuit for providing a measure of manual control of the controller for additive injection pump **22**.

Figure 2 shows a functional diagram depicting one embodiment of the system for controlling and monitoring the injection of additives into multiple wellbores, utilizing a central controller on an addressable control bus.

Figure 3 is a schematic illustration of a wellsite chemical injection system which responds to in-situ measurements of downhole and surface parameters of interests according to one embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 1 is a schematic diagram of a wellsite chemical injection system **10** according to one embodiment of the present invention. The system **10**, in one aspect, is shown as injecting and monitoring of chemicals **13a** into a wellbore **50** and, in another aspect, injecting and monitoring of chemicals **13b** into a wellsite surface treatment or processing unit **75**. The wellbore **50** is shown to be a production well using typical completion equipment. The wellbore **50** has a production zone **52** which includes multiple perforations **54** through the formation **55**. Formation fluid **56** enters a production tubing **60** in the well **50** via perforations **54** and passages **62**. A screen **58** in the annulus **51** between the production tubing **60** and the formation **55** prevents the flow of solids into the production tubing **60** and also reduces the velocity of the formation fluid entering into the production tubing **60** to acceptable levels. An upper packer **64a** above the perforations **54** and a lower

packer **64b** in the annulus **51** respectively isolate the production zone **52** from the annulus **51a** above and annulus **51b** below the production zone **52.** A flow control valve **66** in the production tubing **60** can be used to control the fluid flow to the surface **12.** A flow control valve **67** may be placed in the production tubing **62** below the perforations **54** to control fluid flow from any production zone below the production zone **52.**

A smaller diameter tubing, such as tubing **68**, may be used to carry the fluid from the production zones to the surface. A production well usually includes a casing **40** near the surface and wellhead equipment **42** over the wellbore. The wellhead equipment generally includes a blow-out preventor stack **44** and passages for supplying fluids into the wellbore **50.** Valves (not shown) are provided to control fluid flow to the surface **12.** Wellhead equipment **42** and production well equipment, such as shown in the production well **60**, are well known and thus are not described in greater detail.

Referring back to **Figure 1**, in one aspect of the present invention, the desired chemical **13a** from a source **16** thereof is injected into the wellbore **50** via an injection line **14** by a suitable pump, such as a positive displacement pump **18** ("additive pump"). The chemical **13a** flows

through the line **14** and discharges into the production tubing **60** near the production zone **52** via inlets or passages **15**. The same or different injection lines may be used to supply chemicals to different production zones. In **Figure 1**, line **14** is shown extending to a production zone below the zone **52**. Separate injection lines allow injection of different additives at different well depths. The same also holds for injection of additives in pipelines or surface processing facilities.

A suitable high-precision, low-flow, flow meter **20** (such as gear-type meter or a nutating meter), measures the flow rate through line **14** and provides signals representative of the flow rate. The pump **18** is operated by a suitable device **22** such as a motor. The stroke of the pump **18** defines fluid volume output per stroke. The pump stroke and/or the pump speed are controlled, e.g., by a 4 - 20 milliamperes control signal to control the output of the pump **18**. The control of air supply controls a pneumatic pump.

In the present invention, an onsite controller **80** controls the operation of the pump **18**, either utilizing programs stored in a memory **91** associated with the wellsite controller **80** and/or instructions provided to the wellsite controller **80** from a remote controller or processor **82**.

The wellsite controller **80** preferably includes a microprocessor **90**, resident memory **91** which may include read only memories (ROM) for storing programs, tables and models, and random access memories (RAM) for storing data. The microprocessor **90**, utilizing signals from the flow meter **20** received via line **21** and programs stored in the memory **91** determining the flow rate of the additive and displays such flow rate on the display **81**. The wellsite controller **80** can be programmed to alter the pump speed, pump stroke or air supply to deliver the desired amount of the chemical **13a**. The pump speed or stroke, as the case may be, is increased if the measured amount of the chemical injected is less than the desired amount and decreased if the injected amount is greater than the desired amount. The onsite controller **80** also includes circuits and programs, generally designated by numeral **92** to provide interface with the onsite display **81** and to perform other functions.

The onsite controller **80** polls, at least periodically, the flow meter **20** and determines therefrom the chemical injection flow rate and generates data/signals which are transmitted to a remote controller **82** via a data link **85**. Any suitable two-way data link **85** may be utilized. There also may be a data management system associated with the remote controller. Such data links may include, among others, telephone

modems, radio frequency transmission, microwave transmission and satellites utilizing either EIA-232 or EIA-485 communications protocols (this allows the use of commercially available off-the-shelf equipment). The remote controller **82** is preferably a computer-based system and can transmit command signals to the controller **80** via the link **85**. The remote controller **82** is provided with models/programs and can be operated manually and/or automatically to determine the desired amount of the additive to be injected. If the desired amount differs from the measured amount, it sends corresponding command signals to the wellsite controller **80**. The wellsite controller **80** receives the command signals and adjusts the flow rate of the chemical **13a** into the well **50** accordingly. The remote controller **82** can also receive signals or information from other sources and utilize that information for additive pump control.

The onsite controller **80** preferably includes protocols so that the flow meter **20**, pump control device **22**, and data links **85** made by different manufacturers can be utilized in the system **10**. In the oil industry, the analog output for pump control is typically configured for 0-5 VDC or 4-20 milliampere (mA) signal. In one mode, the wellsite controller **80** can be programmed to operate for such output. This allows

for the system **10** to be used with existing pump controllers. A suitable source of electrical power source **89**, e.g., a solar-powered DC or AC power unit, or an onsite generator provides power to the controller **80**, converter **83** and other electrical circuit elements. The wellsite controller **80** is also provided with a display **81** that displays the flow rates of the individual flow meters. The display **81** may be scrolled by an operator to view any of the flow meter readings or other relevant information. The display **81** is controllable either by a signal from the remote controller **82** or by a suitable portable interface device **87** at the well site, such as an infrared device or a key pad. This allows the operator at the wellsite to view the displayed data in the controller **80** non-intrusively without removing the protective casing of the controller.

Still referring to **Figure 1**, the produced fluid **69** received at the surface is processed by a treatment unit or processing unit **75**. The surface processing unit **75** may be of the type that processes the fluid **69** to remove solids and certain other materials such as hydrogen sulphide, or that processes the fluid **69** to produce semi-refined to refined products. In such systems, it is desired to periodically or continuously inject certain chemicals. A system, such as system **10** shown in **Figure 1** can be used for injecting and monitoring chemicals into the treatment unit **75**.

In addition to the flow rate signals **21** from the flow meter **20**, the wellsite controller **80** may be configured to receive signals representative of other parameters, such as the rpm of the pump **18**, or the motor **22** or the modulating frequency of a solenoid valve. In one mode of operation, the wellsite controller **80** periodically polls the meter **20** and automatically adjusts the pump controller **22** via an analog input **22a** or alternatively via a digital signal of a solenoid controlled system (pneumatic pumps). The controller **80** also can be programmed to determine whether the pump output, as measured by the meter **20**, corresponds to the level of signal **22a**. This information can be used to determine the pump efficiency. It can also be an indication of a leak or another abnormality relating to the pump **18**. Other sensors **94**, such as vibration sensors, temperature sensors may be used to determine the physical condition of the pump **18**. Sensors which determine properties of the wellbore fluid can provide information of the treatment effectiveness of the chemical being injected, which information can then be used to adjust the chemical flow rate as more fully described below in reference to **Figure 3**. The remote controller **82** may control multiple onsite controllers via a link **98**. A data base management system **99** may be provided for the remote controller **82** for historical monitoring and management of data. The system **10** may further be adapted to communicate with other locations

via a network (such as the Internet) so that the operators can log into the database **99** and monitor and control chemical injection of any well associated with the system **10.**

Figure 1A shows an alternative manner for controlling the additive pump. This configuration includes a control valve, such as a solenoid valve **102**, in the supply line **106** from a source of fluid under pressure (not shown) for the pump controller **22**. The controller **80** controls the operation of the valve via suitable control signals, such as digital signals, provided to the valve **102** via line **104**. The control of the valve **22** controls the speed or stroke of the pump **18** and thus the amount of the additive supplied to the wellbore **50**. The valve control **102** may be modulated to control the output of the pump **18**.

The automated modes of operation (both local and/or from the remote location) of the injection system **10** are described above. However, in some cases it is desirable to operate the control system **10** in a manual mode, such as by an operator at the wellsite. Manual control may be required to override the system because of malfunction of the system or to repair parts of the system **10. Figure 1B** shows a circuit **124** for manual control of the additive pump **18**. The circuit **124** includes

a switch **120** associated with the controller (see **Figure 1**), which in a first or normal position (solid line **22b**) allows the analog signal **22a** from the controller to control the motor **22** and in the second position (dotted line **22c**) allows the manual circuit **124** to control the motor **22**. The circuit **124**, in one configuration, may include a current control circuit, such as a rheostat **126** that enables the operator to set the current at the desired value. In the preferred embodiment, the current range is set between 4 and 20 milliamperes, which is compatible with the current industry protocol. The wellsite controller is designed to interface with manually-operated portable remote devices, such as infrared devices. This allows the operator to communicate with and control the operation of the system **10** at the well site, e.g., to calibrate the system, without disassembling the wellsite controller **80** unit. This operator may reset the allowable ranges for the flow rates and/or setting a value for the flow rate.

As noted above, it is common to drill several wellbores from the same location. For example, it is common to drill 10-20 wellbores from a single offshore platform. After the wells are completed and producing, a separate pump and meter are installed to inject additives into each such wellbore. **Figure 2** shows a functional diagram depicting a system **200**

for controlling and monitoring the injection of additives into multiple wellbores **202a-202m** according to one embodiment of the present invention. In the system configuration of **Figure 2**, a separate pump supplies an additive from a separate source to each of the wellbores **202a-202m**. Pump **204a** supplies an additive from the source **206a.** Meter **208a** measures the flow rate of the additive into the wellbore **202a** and provides corresponding signals to a central wellsite controller **240.** The wellsite controller **240** in response to the flow meter signals and the programmed instructions or instructions from a remote controller **242** controls the operation of pump control device or pump controller **210a** via a bus **241** using addressable signaling for the pump controller **210a.** Alternatively, the wellsite controller **240** may be connected to the pump controllers via a separate line. Furthermore, a plurality of wellsite controllers, one for each pump may be provided, wherein each such controller communicating with the remote controller **242** via a suitable communication link as described above in reference to **Figure 1**. The wellsite controller **240** also receives signal from sensor **S1a** associated with pump **204a** via line **212a** and from sensor **S2a** associated with the pump controller **210a** via line **212a.** Such sensors may include rpm sensor, vibration sensor or any other sensor that provides information about a parameter of interest of such devices. Additives to the wells

202b-202m are respectively supplied by pumps **204b-204m** from sources **206b-206m**. Pump controllers **210b-210m** respectively control pumps **204b-204m** while flow meters **208b-208m** respectively measure flow rates to the wells **202b-202m**. Lines **212b-212m** and lines **214b-214m** respectively communicate signals from sensor S_{1b}-S_{1m} and S_{2b}-S_{2m} to the central controller **240**. The controller **240** utilizes memory **246** for storing data in memory **244** for storing programs in the manner described above in reference to system **10** of **Figure 1**. A suitable two-way communication link **245** allows data and signals communication between the central wellsite controller **240** and the remote controller **242**. The individual controllers would communicate with the sensors, pump controllers and remote controller via suitable corresponding connections.

The central wellsite controller **240** controls each pump independently. The controller **240** can be programmed to determine or evaluate the condition of each of the pumps **204a-204m** from the sensor signals S_{1a}-S_{1m} and S_{2a}-S_{2m}. For example the controller **240** can be programmed to determine the vibration and rpm for each pump. This can provide information about the effectiveness of each such pump. The controller **240** can be programmed to poll the flow rates and parameters of interest relating to each pump, perform desired computations at the

well site and then transmit the results to the remote controller **242** via the communication link **248**. The remote controller **242** may be programmed to determine any course of action from the received information and any other information available to it and transmit corresponding command signals to the wellsite central controller **240**. Again, communication with a plurality of individual controllers could be done in a suitable corresponding manner.

Figure 3 is a schematic illustration of wellsite remotely-controllable closed-loop chemical injection system **300** which responds to measurements of downhole and surface parameters of interest according to one embodiment of the present invention. Certain elements of the system **300** are common with the system **10** of **Figure 1**. For convenience, such common elements have been designated in **Figure 3** with the same numerals as specified in **Figure 1**.

The well **50** in **Figure 3** further includes a number of downhole sensors S_{3a}-S_{3m} for providing measurements relating to various downhole parameters. Sensor S_{3a} provide a measure of chemical characteristics of the downhole fluid, which may include a measure of the paraffins, hydrates, sulphides, scale, asphaltenes, emulsion, etc. Other sensors and

devices S_{3m} may be provided to determine the fluid flow rate through perforations **54** or through one or more devices in the well **50**. The signals from the sensors may be partially or fully processed downhole or may be sent uphole via signal/date lines **302** to a wellsite controller **340**. In the configuration of **Figure 3**, a common central control unit **340** is preferably utilized. The control unit is a microprocessor-based unit and includes necessary memory devices for storing programs and data and devices to communicate information with a remote control unit **342** via suitable communication link **342**.

The system **300** may include a mixer **310** for mixing or combining at the wellsite a plurality of **chemical#1 - chemical#m** stored in sources **313a-312m** respectively. In some situations, it is desirable to transport certain chemicals in their component forms and mix them at the wellsite for safety and environmental reasons. For example, the final or combined chemical may be toxic, although while the component parts may be non-toxic. Chemicals may be shipped in concentrated form and combined with diluents at the wellsite prior to injection into the well **50**. In one embodiment of the present invention, chemicals to be combined, such as chemicals **chemical#1-chemical#m** are metered into the mixer by associated pumps **314a-314m**. Meters **316a-316m** measure the

amounts of the chemicals from sources **312a-312m** and provide corresponding signals to the control unit **340**, which controls the pumps **314a-314m** to accurately dispense the desired amounts into the mixer **310**. A pump **318** pumps the combined chemicals from the mixer **310** into the well **50**, while the meter **320** measures the amount of the dispensed chemical and provides the measurement signals to the controller **340**. A second chemical required to be injected into the well **50** may be stored in the source **322**, from which source a pump **324** pumps the required amount of the chemical into the well. A meter **326** provides the actual amount of the chemical dispensed from the source **322** to the controller **340**, which in turn controls the pump **324** to dispense the correct amount.

The wellbore fluid reaching the surface may be tested on site with a testing unit **330**. The testing unit **330** provides measurements respecting the characteristics of the retrieved fluid to the central controller **340**. The central controller utilizing information from the downhole sensors S_{3a}-S_{3m}, the tester unit data and data from any other surface sensor (as described in reference to **Figure 1**) computes the

effectiveness of the chemicals being supplied to the well **50** and determine therefrom the correct amounts of the chemicals and then alters the amounts, if necessary, of the chemicals to the required levels.

The controller also provides the computed and/or raw data to the remote control unit **342** and takes corrective actions in response to any command signals received from the remote control unit **342**. Thus, the system of the present invention at least periodically monitors the actual amounts of the various chemicals being dispensed, determines the effectiveness of the dispensed chemicals, at least with respect to maintaining certain parameters of interest within their respective predetermined ranges, determines the health of the downhole equipment, such as the flow rates and corrosion, determines the amounts of the chemicals that would improve the effectiveness of the system and then causes the system to dispense chemicals according to newly computed amounts. The models **344** may be dynamic models in that they are updated based on the sensor inputs.

Thus, the system described in **Figure 3** is a closed-loop, remotely controllable chemical injection system. This system may be adapted for use with a hydrocarbon processing unit **75** at the wellsite or for a pipeline

carrying oil and gas. The chemical injection system of **Figure 3** is particularly useful for subsea pipelines. In oil and gas pipelines, it is particulary important to monitor the incipient formation of hydrates and take prompt corrective actions to prevent them from forming. The system of the present invention can automatically take broad range of actions to assure proper flow of hydrocarbons through pipelines, which not only can avoid the formation of hydrates but also the formation of other harmful elements such as asphaltenes. Since the system **300** is closed loop in nature and responds to the in-situ measurements of the characteristics of the treated fluid and the equipment in the fluid flow path, it can administer the optimum amounts of the various chemicals to the wellbore or pipeline to maintain the various parameters of interest within their respective limits or ranges, thereby, on the one hand, avoid excessive use of the chemicals, which can be very expensive and, on the other hand, take prompt corrective action by altering the amounts of the injected chemicals to avoid formation of harmful elements.

While foregoing disclosure is directed to the preferred embodiments of the invention, various modifications will be apparent to those skilled in the art. It is intended that all variations within the scope and spirit of the appended claims be embraced by the foregoing disclosure.

WHAT IS CLAIMED IS:

1. A system for monitoring and controlling supply of an additive introduced into formation fluid recovered through a wellbore, comprising:

(a) a flow control device for supplying a selected additive from a source thereof at wellsite to the formation fluid;

(b) a flow measuring device for providing a signal representative of flow rate of the selected additive supplied to said formation fluid;

(c) a first onsite controller receiving the signals from the flow measuring device and determining therefrom the flow rate, said first onsite controller transmitting signals representative of the flow rate to a remote location; and

(d) a second remote controller at said remote location receiving signals transmitted by said first controller and in response thereto transmitting command signals to said first controller representative of a desired change in the flow rate of the selected additive;

wherein the first onsite controller causes the flow control device to change the flow rate of the selected additive in response to the command signals.

2. The system of claim 1, wherein said first onsite controller includes a display that displays at least the flow rate of the selected additive supplied to the formation fluid.

3. The system of claim 1, wherein the additive is supplied to one of (a) a selected location in the wellbore or (b) a hydrocarbon processing unit processing the formation fluid at the wellsite.

4. The system of claim 1, wherein the flow measuring device is a positive displacement flow meter.

5. The system of claim 1 further comprising a program associated with said first onsite controller that enables the onsite controller to perform a plurality of on-board functions.

6. The system of claim 5, wherein said plurality of functions includes at least one of (i) determining the difference between the amount of additive introduced and a predetermined desired amount, (ii) calibration of the flow control device, and (iii) periodic polling of said flow measuring device.

7. The system of claim 1, wherein said first onsite controller is programable (i) at the wellsite or, (ii) by said second remote controller.

8. The system of claim 1 further comprising a data base management system associated with said second remote controller.

9. The system of claim 8, wherein said second remote controller is adapted to communicate with a plurality of computers over a network.

10. The system of claim 1, wherein the flow control device is one of (i) an electric pump, or (ii) a pneumatic pump.

11. The system of claim 1 further including at least one sensor providing a measure of a characteristic of said formation fluid.

12. The system of claim 11, wherein said system alters the supply of said selected additive in response to said measured characteristic.

13. A system for monitoring and controlling supply of additives to a plurality of wells, said system further comprising:

(a) a supply line and a flow control device associated with each of said plurality of wells;

(b) a flow measuring device in each said supply line measuring a parameter indicative of the flow rate of an additive supplied to a corresponding well, each said flow measuring device generating signals indicative of a flow rate of the additive supplied to its corresponding well; and

(c) a first onsite controller receives signals from each of the flow measuring devices and transmits signals representative of the flow rate for each well to a second remote controller which in response to the signals transmitted by said first onsite controller transmits to said first onsite controller command signals representative of a desired change in the flow rate of the additives supplied to each said well.

14. The system of claim 13, wherein the additive is injected into each said well at predetermined depths.

15. A method of monitoring at a wellsite supply of additives to formation fluid recovered through a wellbore and controlling said supply from a remote location, said method comprising:

(a) controlling the flow rate of the supply of a selected additive from a source thereof at the wellsite into said formation fluid via a supply line;

(b) measuring a parameter indicative of the flow rate of the additive supplied to said formation fluid and generating a signal indicative of said flow rate;

(c) receiving at the wellsite the signal indicative of the flow rate and transmitting a signal representative of the flow rate to the remote location; and

(d) receiving at said remote location signals transmitted from the wellsite and in response thereto transmitting command signals to the wellsite representative of a desired change in the flow rate of the additive supplied; and

(e) controlling the flow rate of the supply of the additive in response to the command signals

16. The method of claim 15 further comprising displaying at the well site the flow rate of the additive supplied to the formation fluid.

17. The method of claim 16 further comprising a manual override of controlling the flow rate of the supply of the additive by performing a function selected from (i) setting a flow rate of the additive, (ii) setting a range of allowable values for the flow rate of the additive, and (iii) a combinations thereof.

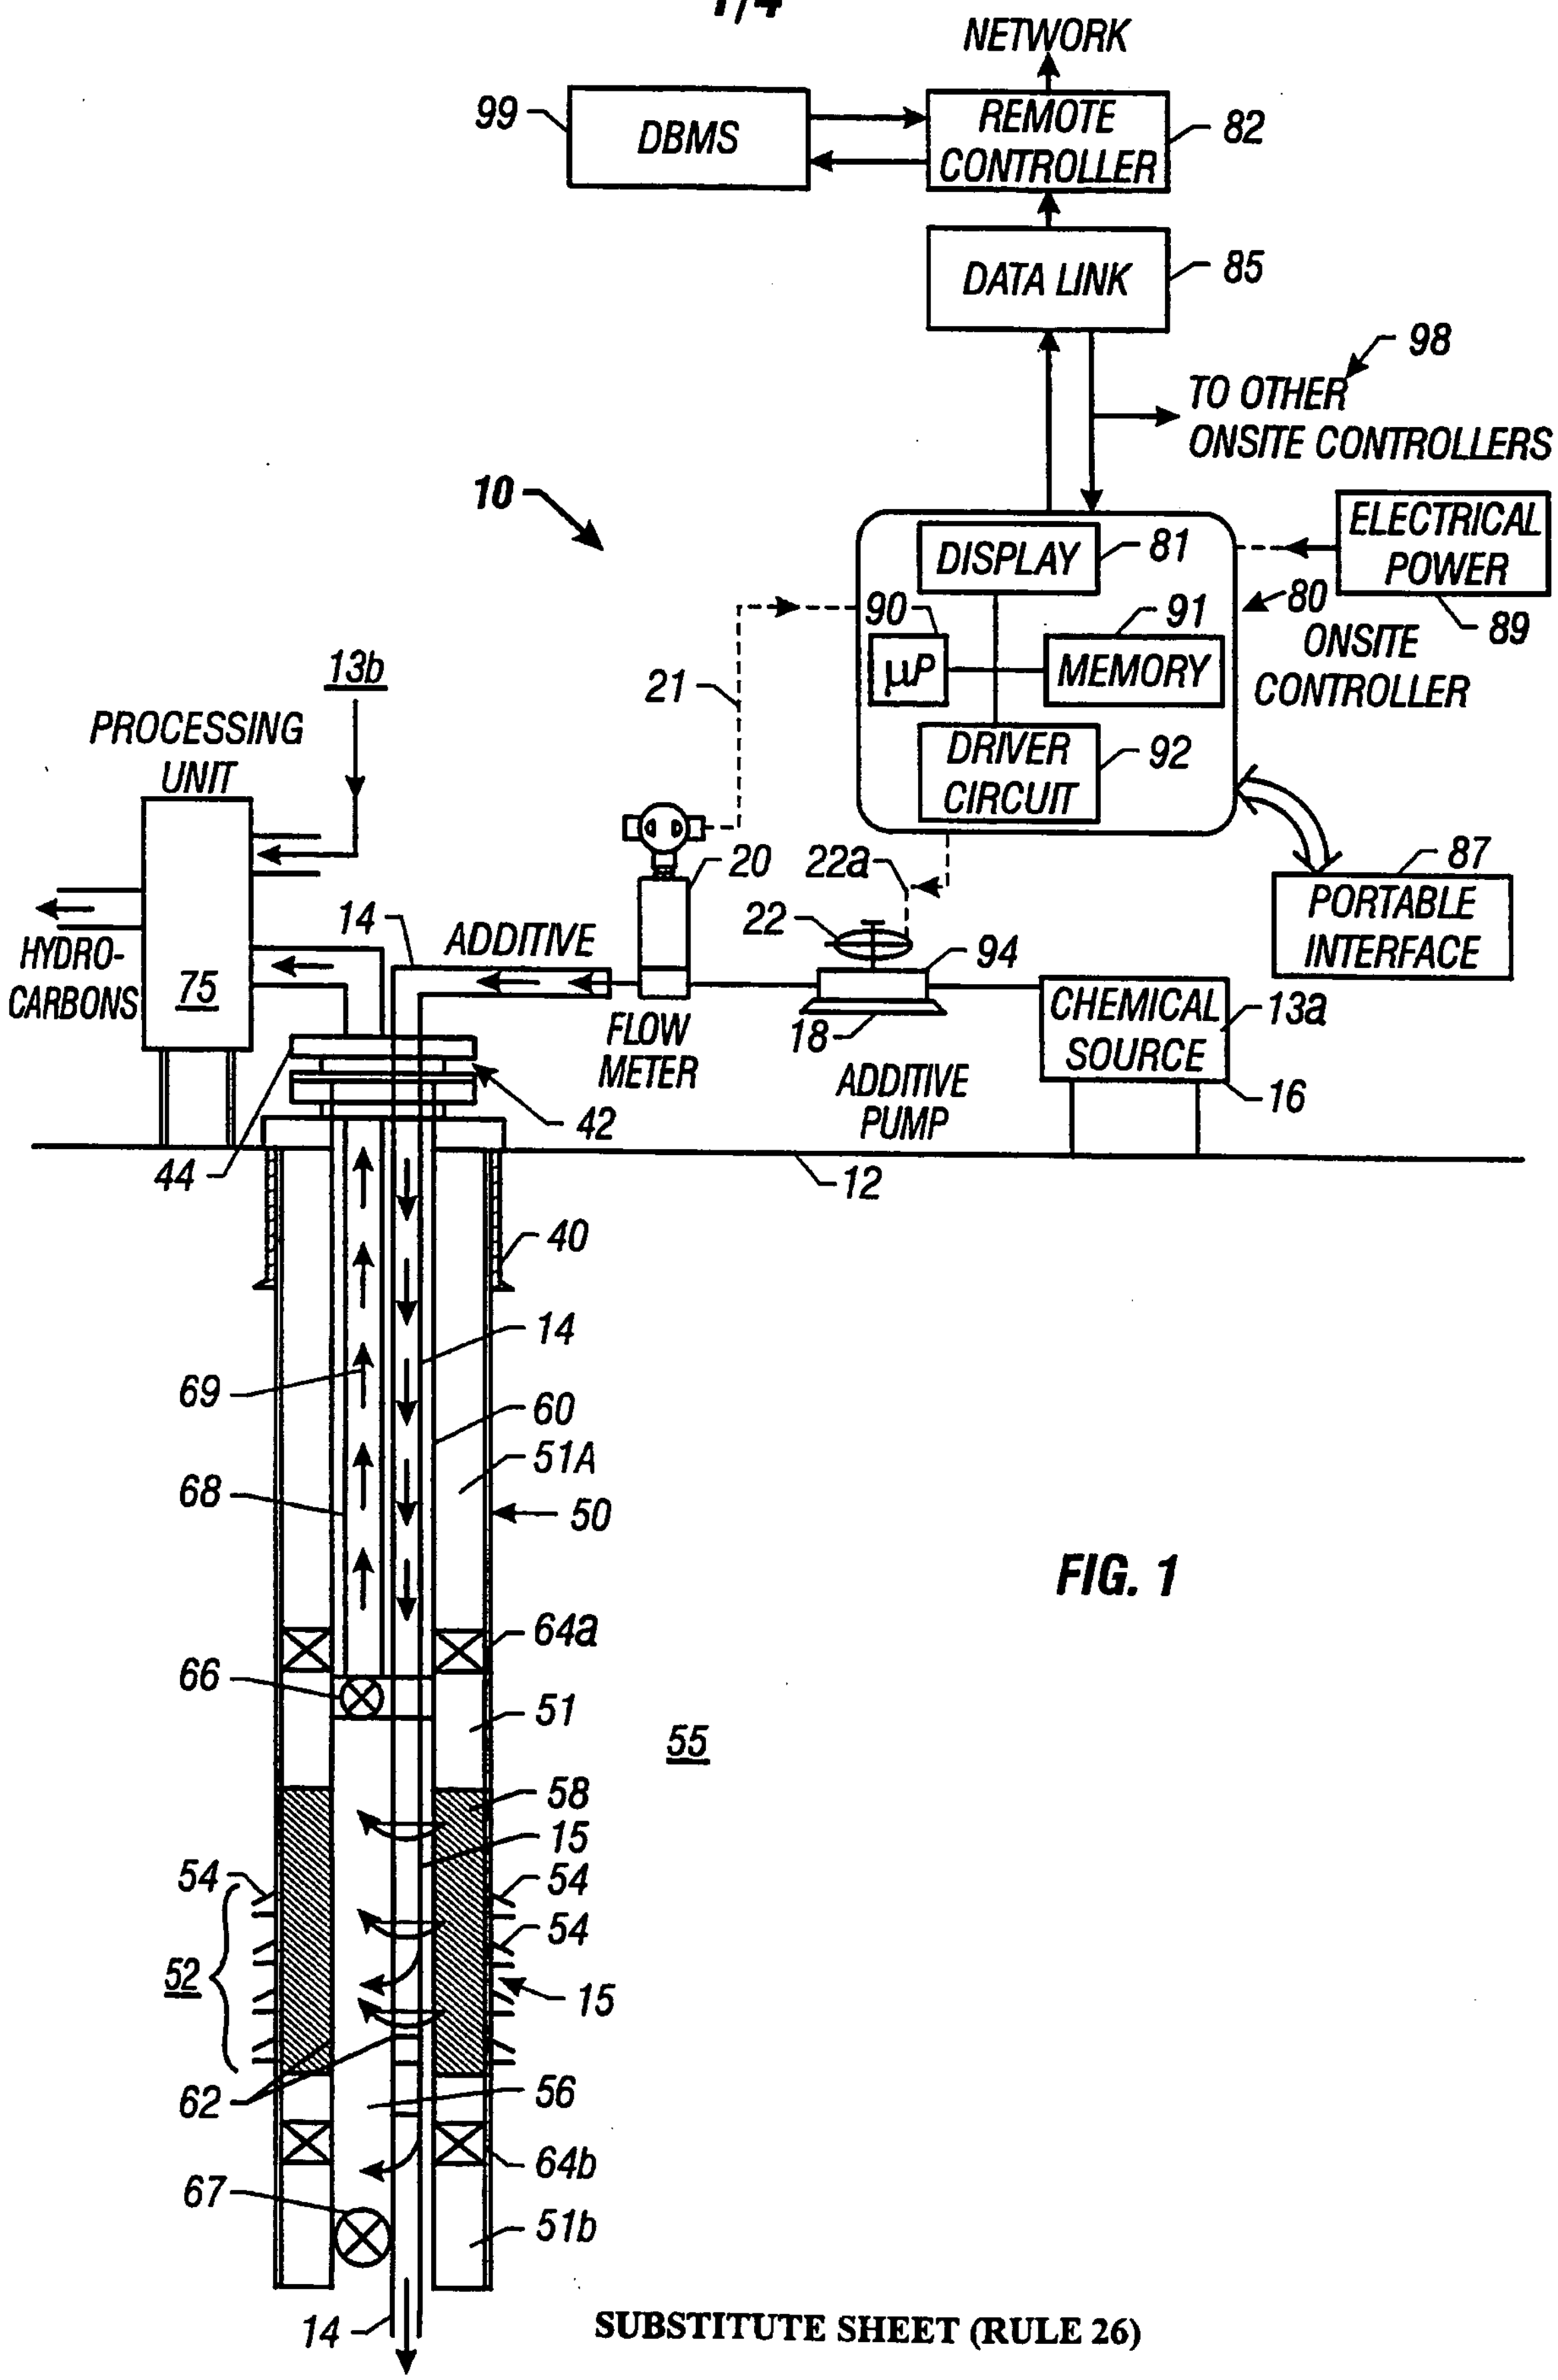

NETWORK
99
DBMS
REMOTE CONTROLLER
82
DATA LINK
85
98
TO OTHER ONSITE CONTROLLERS
10
DISPLAY
81
ELECTRICAL POWER
89
80
ONSITE CONTROLLER
90
91
μP
MEMORY
21
DRIVER CIRCUIT
92
87
PORTABLE INTERFACE
13b
PROCESSING UNIT
HYDRO-CARBONS
75
14
ADDITIVE
20
22a
22
94
FLOW METER
18
ADDITIVE PUMP
CHEMICAL SOURCE
13a
16
42
44
12
40
14
69
60
51A
68
50
64a
66
51
55
58
15
54
54
54
52
15
62
56
64b
67
51b
14

FIG. 1

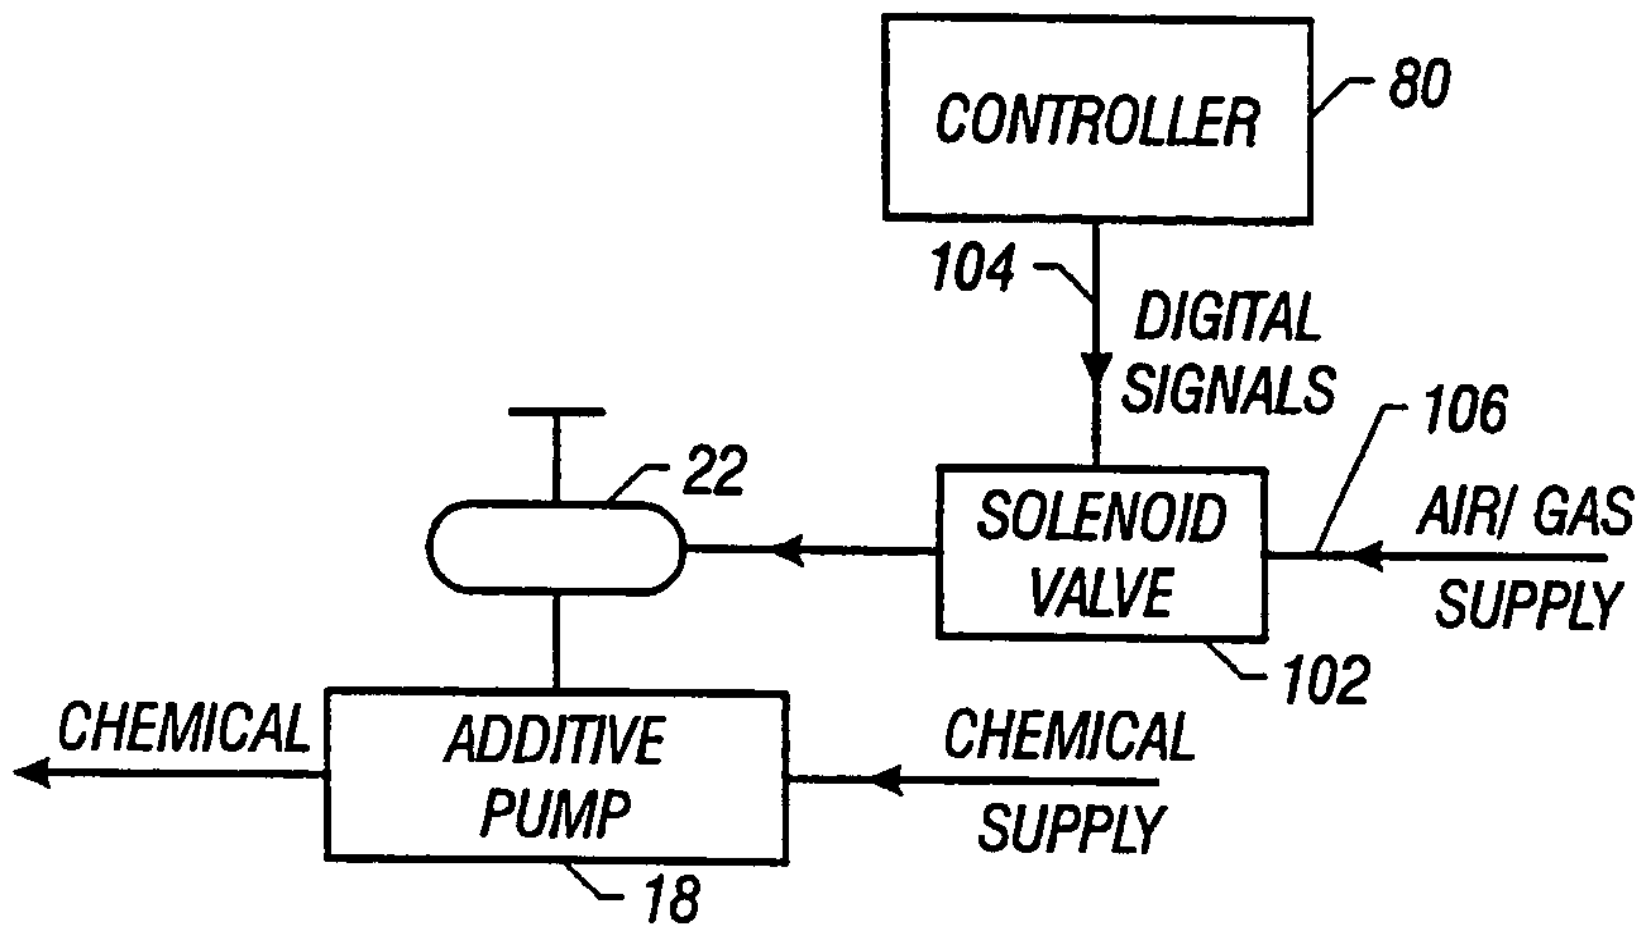
CONTROLLER
80
104
DIGITAL SIGNALS
106
22
SOLENOID VALVE
AIR/ GAS SUPPLY
102
CHEMICAL
ADDITIVE PUMP
CHEMICAL SUPPLY
18

FIG. 1A

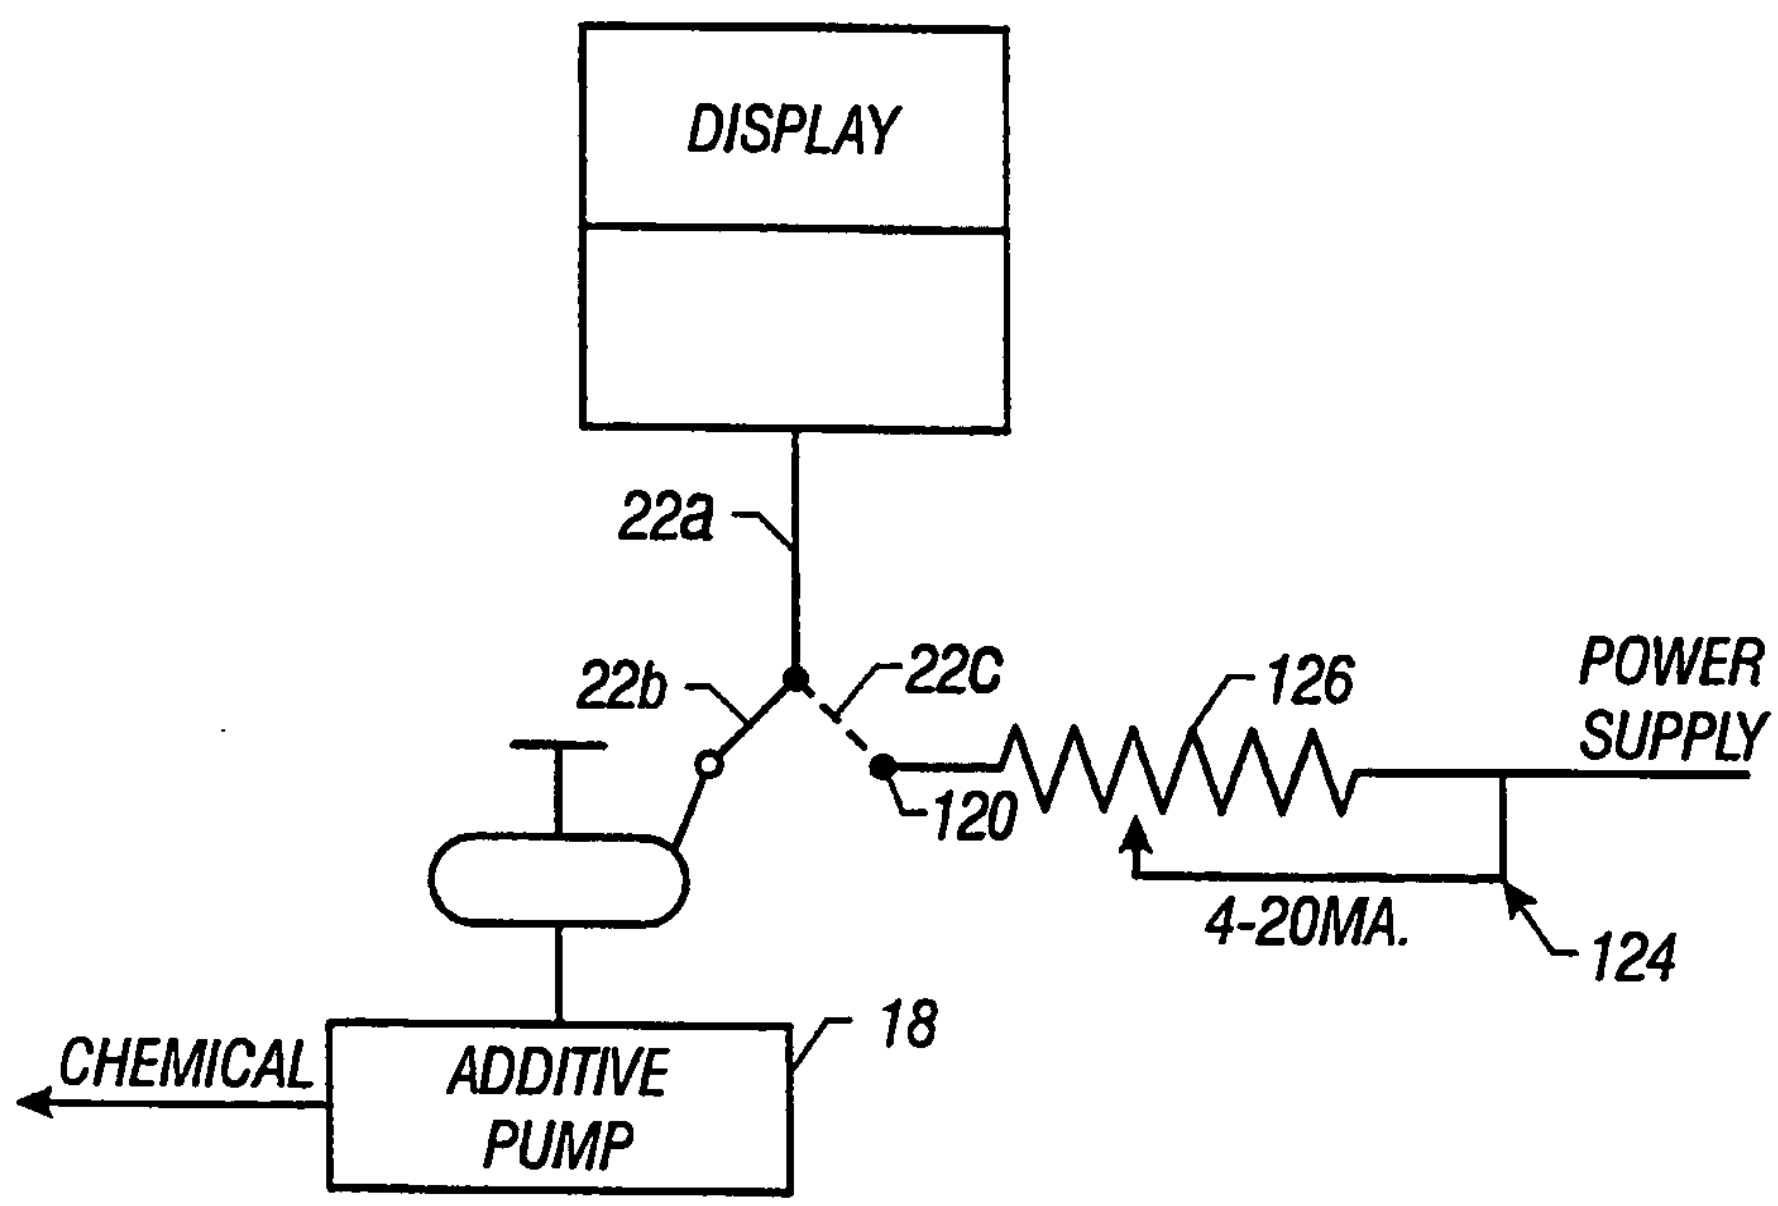
DISPLAY
22a
22b
22C
126
POWER SUPPLY
120
4-20MA.
124
18
CHEMICAL
ADDITIVE PUMP

FIG. 1B

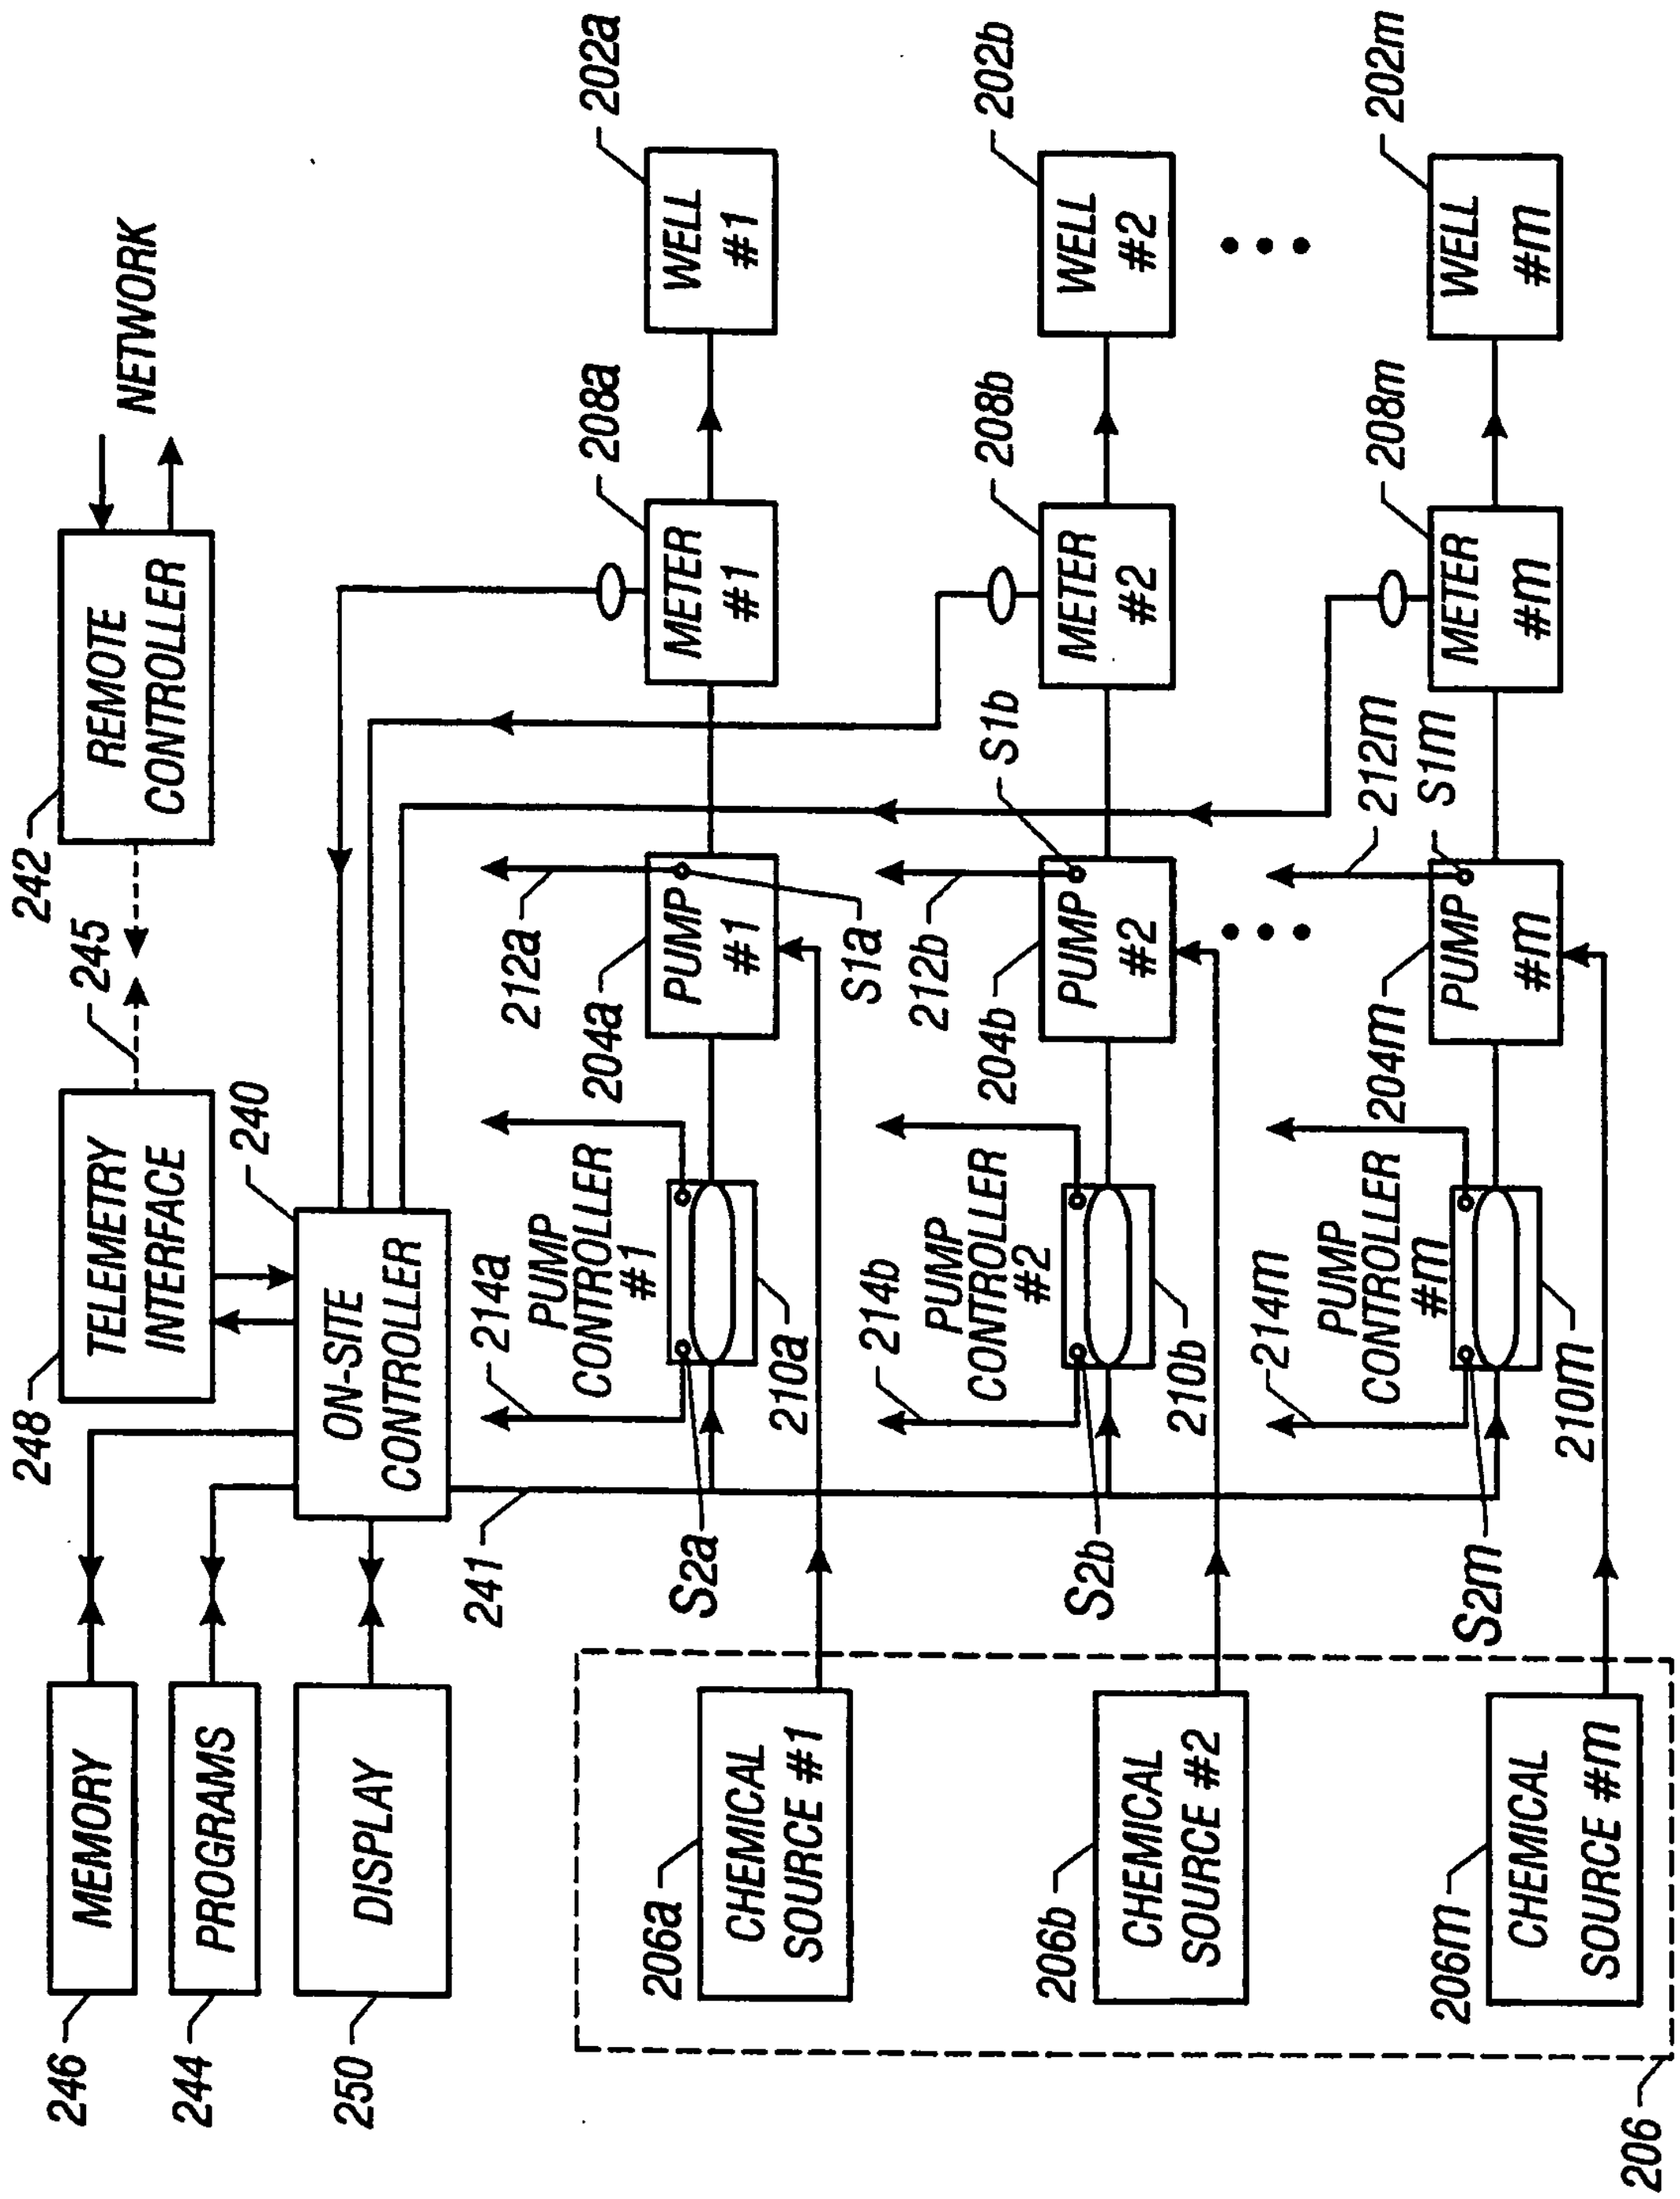
NETWORK
REMOTE CONTROLLER
242
245
TELEMETRY INTERFACE
248
240
ON-SITE CONTROLLER
241
MEMORY
246
PROGRAMS
244
DISPLAY
250
WELL #1
202a
WELL #2
202b
WELL #m
202m
METER #1
208a
METER #2
208b
METER #m
208m
PUMP #1
204a
PUMP #2
204b
PUMP #m
204m
212a
212b
212m
S1a
S1b
S1m
PUMP CONTROLLER #1
214a
210a
PUMP CONTROLLER #2
214b
210b
PUMP CONTROLLER #m
214m
210m
S2a
S2b
S2m
CHEMICAL SOURCE #1
206a
CHEMICAL SOURCE #2
206b
CHEMICAL SOURCE #m
206m
206

FIG. 2

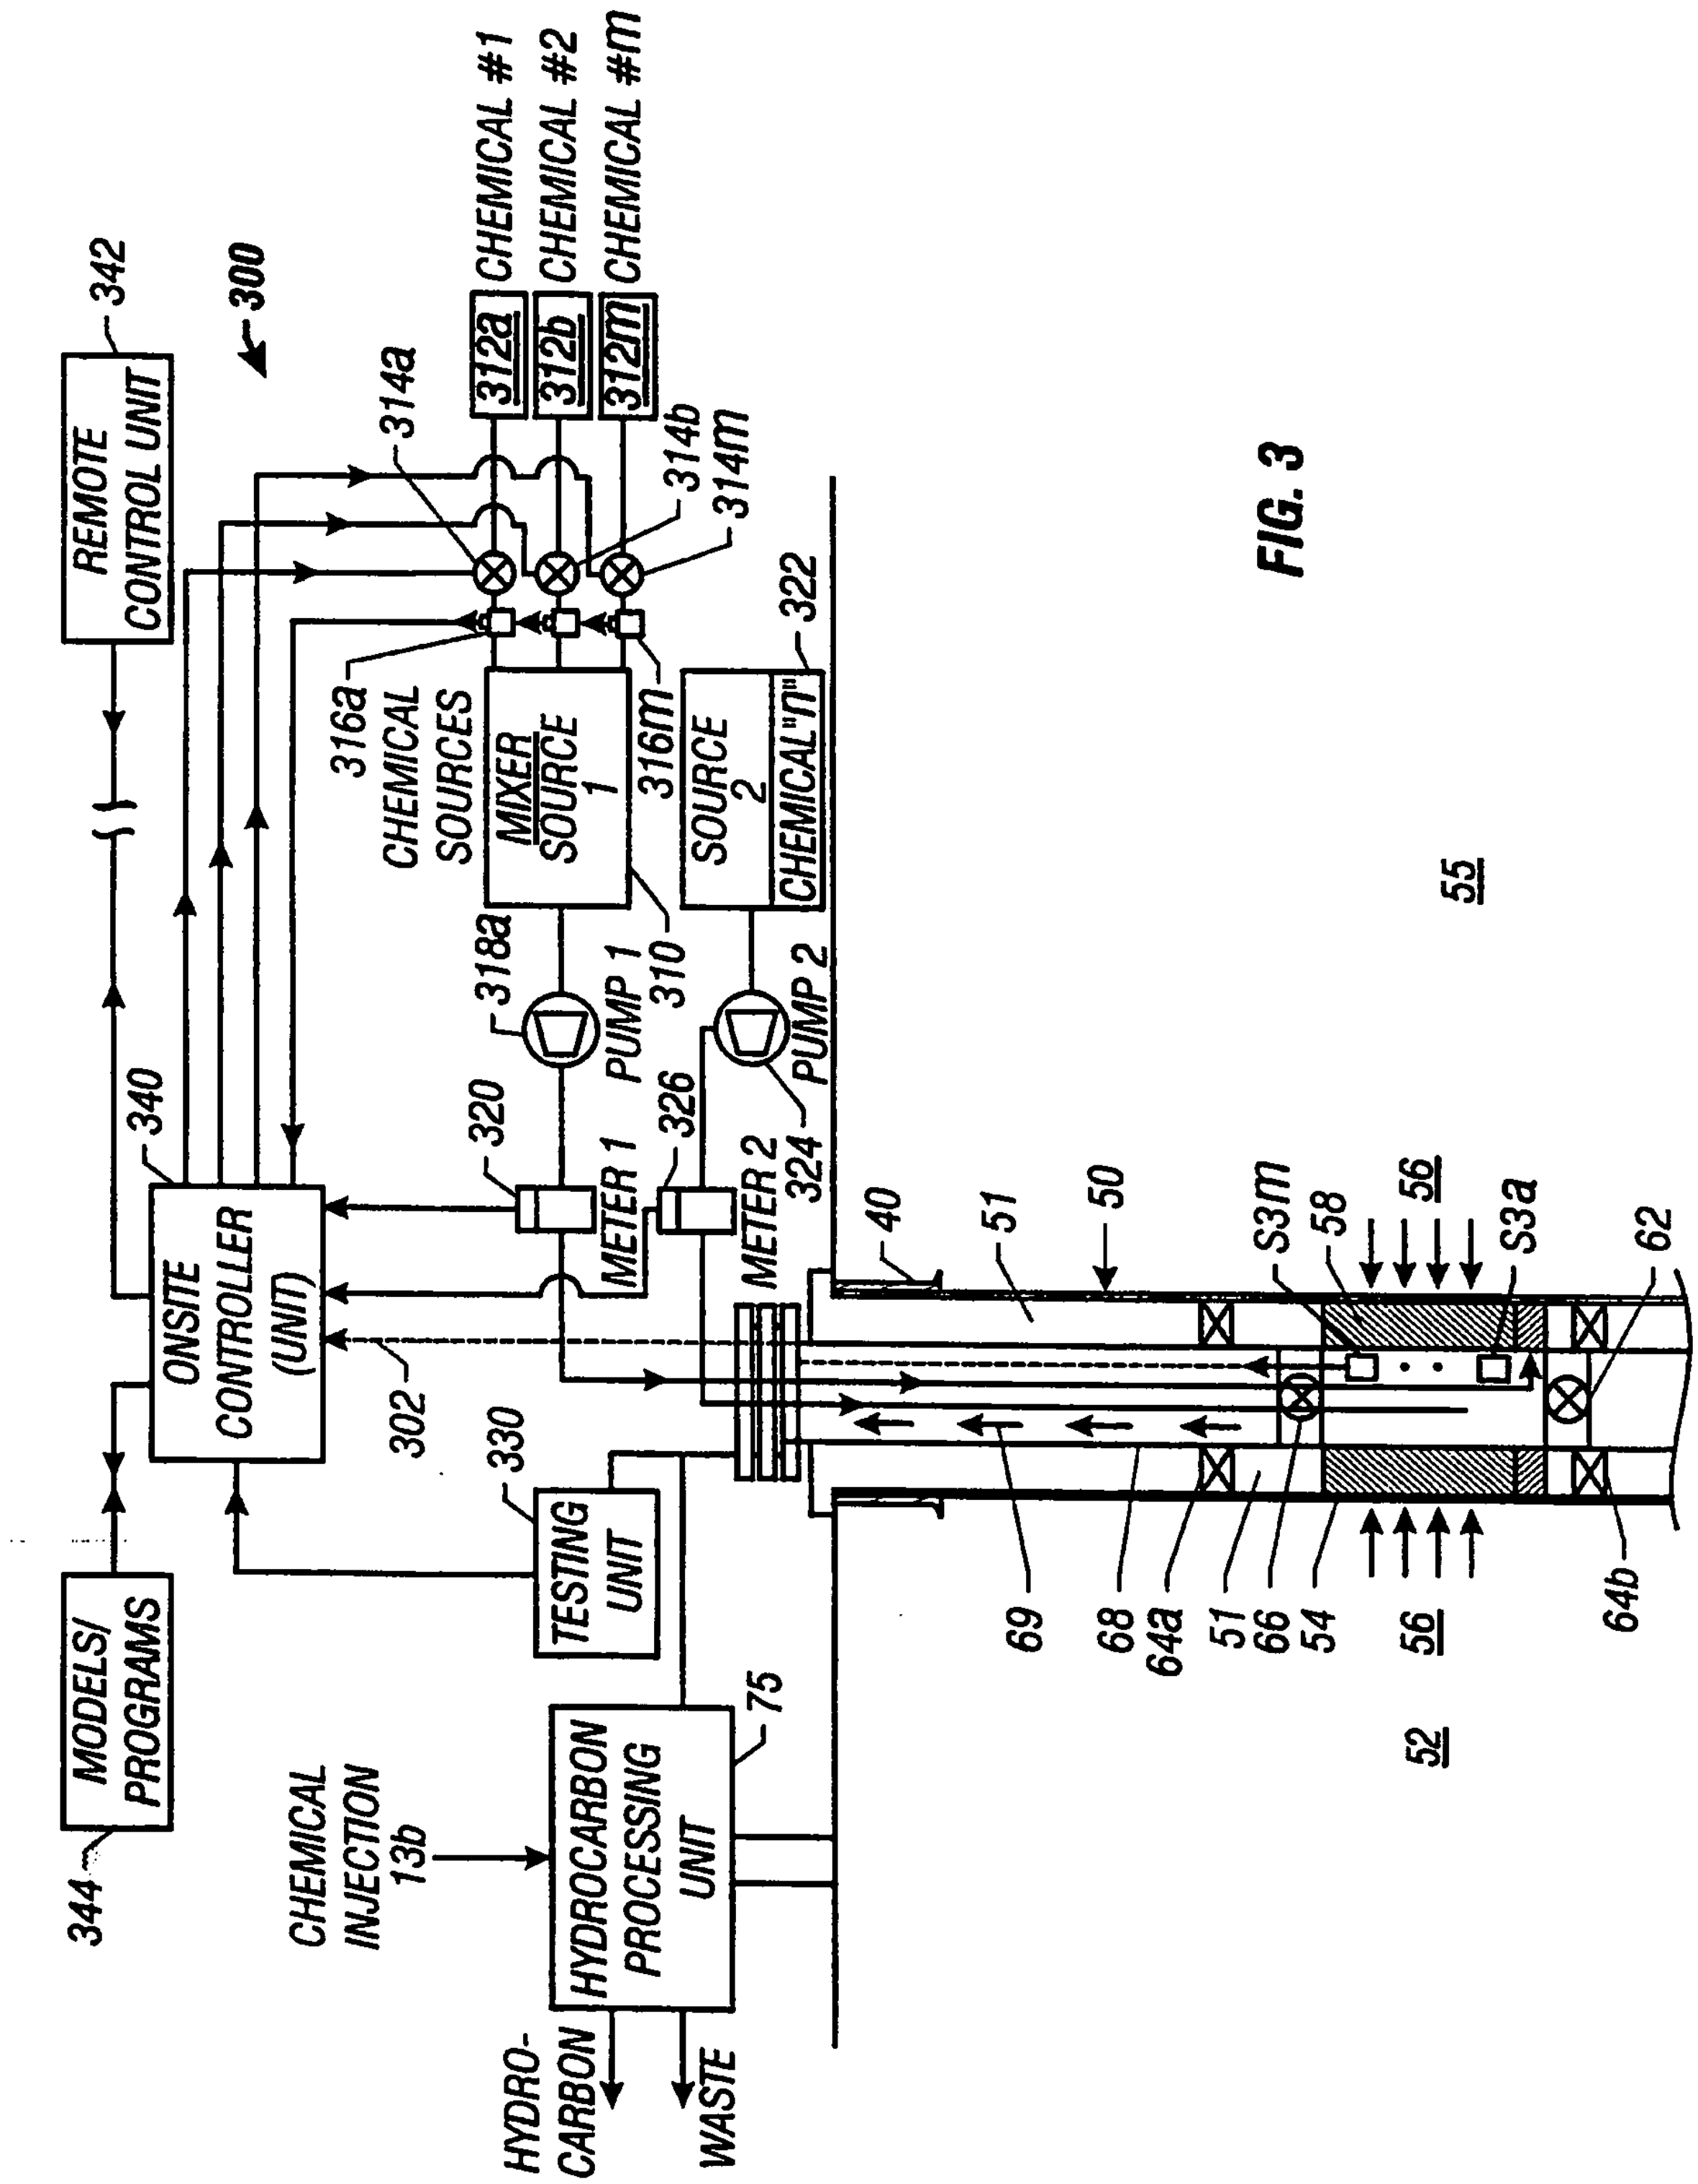

REMOTE CONTROL UNIT
342
300
314a
312a
312b
312m
CHEMICAL #1
CHEMICAL #2
CHEMICAL #m
314b
314m
316a
CHEMICAL SOURCES
MIXER SOURCE 1
316m
SOURCE 2
CHEMICAL "n"
322
318a
PUMP 1
310
PUMP 2
320
METER 1
326
METER 2
324
340
ONSITE CONTROLLER (UNIT)
302
330
TESTING UNIT
MODELS/ PROGRAMS
344
CHEMICAL INJECTION 13b
HYDROCARBON PROCESSING UNIT
75
HYDRO- CARBON
WASTE
40
51
50
S3m
58
56
S3a
62
69
68
64a
51
66
54
56
64b
55
52

FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/30448

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E21B37/06 E21B41/02 E21B43/25

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 57030 A (BAKER HUGHES INC) 17 December 1998 (1998-12-17) page 7, line 15 -page 10, line 31; figures page 17, line 12 -page 19, line 23	1-17
Y	US 5 706 896 A (MULLINS II ALBERT A ET AL) 13 January 1998 (1998-01-13) abstract; figures column 8, line 34 - line 50 column 9, line 31 - line 35 column 17, line 53 - line 64	1-17
A	US 4 284 143 A (SCHERRER NORBERT ET AL) 18 August 1981 (1981-08-18) abstract; figures column 4, line 47 - line 61 column 5, line 13 - line 19 column 5, line 62 -column 6, line 15	1

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"&" document member of the same patent family

Date of the actual completion of the international search

14 March 2000

Date of mailing of the international search report

21/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL – 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Weiand, T

1

Form PCT/ISA/210 (second sheet) (July 1992)

International Application No
PCT/US 99/30448

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 830 112 A (ERICKSON DON J) 16 May 1989 (1989-05-16) column 2, line 59 - line 68 column 5, line 61 -column 6, line 27 column 8, line 1 - line 14; figures	1
A	US 4 665 981 A (HAYATDAVOUDI ASADOLLAH) 19 May 1987 (1987-05-19) abstract; figures column 2, line 52 -column 3, line 21	1
A	US 5 209 301 A (AYRES ROBERT N) 11 May 1993 (1993-05-11) column 6, line 57 - line 68; figures	1
A	US 4 635 723 A (SPIVEY MELVIN F) 13 January 1987 (1987-01-13) abstract; figures	1
A	US 4 436 148 A (MAXWELL RICHARD) 13 March 1984 (1984-03-13) column 3, line 38 - line 46 column 5, line 31 - line 45; figures	1
A	US 5 590 958 A (BATEN ROBERT A ET AL) 7 January 1997 (1997-01-07) abstract; figures	1

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US 99/30448

Patent document cited in search report		Publication date	Patent family member(s)			Publication date
WO 9857030	A	17-12-1998	AU	7273798	A	27-11-1998
			AU	7275398	A	27-11-1998
			AU	7501498	A	30-12-1998
			EP	0910725	A	28-04-1999
			GB	2339902	A	09-02-2000
			NO	991350	A	19-03-1999
			NO	995319	A	20-12-1999
			NO	996082	A	08-02-2000
			WO	9850681	A	12-11-1998
			WO	9850680	A	12-11-1998
US 5706896	A	13-01-1998	AU	697668	B	15-10-1998
			AU	5024296	A	27-08-1996
			CA	2187424	A	15-08-1996
			GB	2302115	A,B	08-01-1997
			GB	2330853	A,B	05-05-1999
			NO	960517	A	12-08-1996
			WO	9624749	A	15-08-1996
			US	5721538	A	24-02-1998
			US	5960883	A	05-10-1999
			US	6012015	A	04-01-2000
			US	5975204	A	02-11-1999
US 4284143	A	18-08-1981	FR	2421272	A	26-10-1979
			GB	2017789	A,B	10-10-1979
			DE	2911956	A	11-10-1979
			ES	478998	A	16-11-1979
			IT	1118520	B	03-03-1986
			JP	54160501	A	19-12-1979
			NL	7902393	A	02-10-1979
			NO	791008	A	01-10-1979
US 4830112	A	16-05-1989	NONE			
US 4665981	A	19-05-1987	NONE			
US 5209301	A	11-05-1993	NONE			
US 4635723	A	13-01-1987	NONE			
US 4436148	A	13-03-1984	US	RE32304	E	16-12-1986
US 5590958	A	07-01-1997	US	5503473	A	02-04-1996
			US	5281023	A	25-01-1994
			AU	1449295	A	01-08-1995
			WO	9519221	A	20-07-1995
			US	5624182	A	29-04-1997
			US	5775803	A	07-07-1996
			US	5441340	A	15-08-1995